


ART 4H



Compact and Versatile.

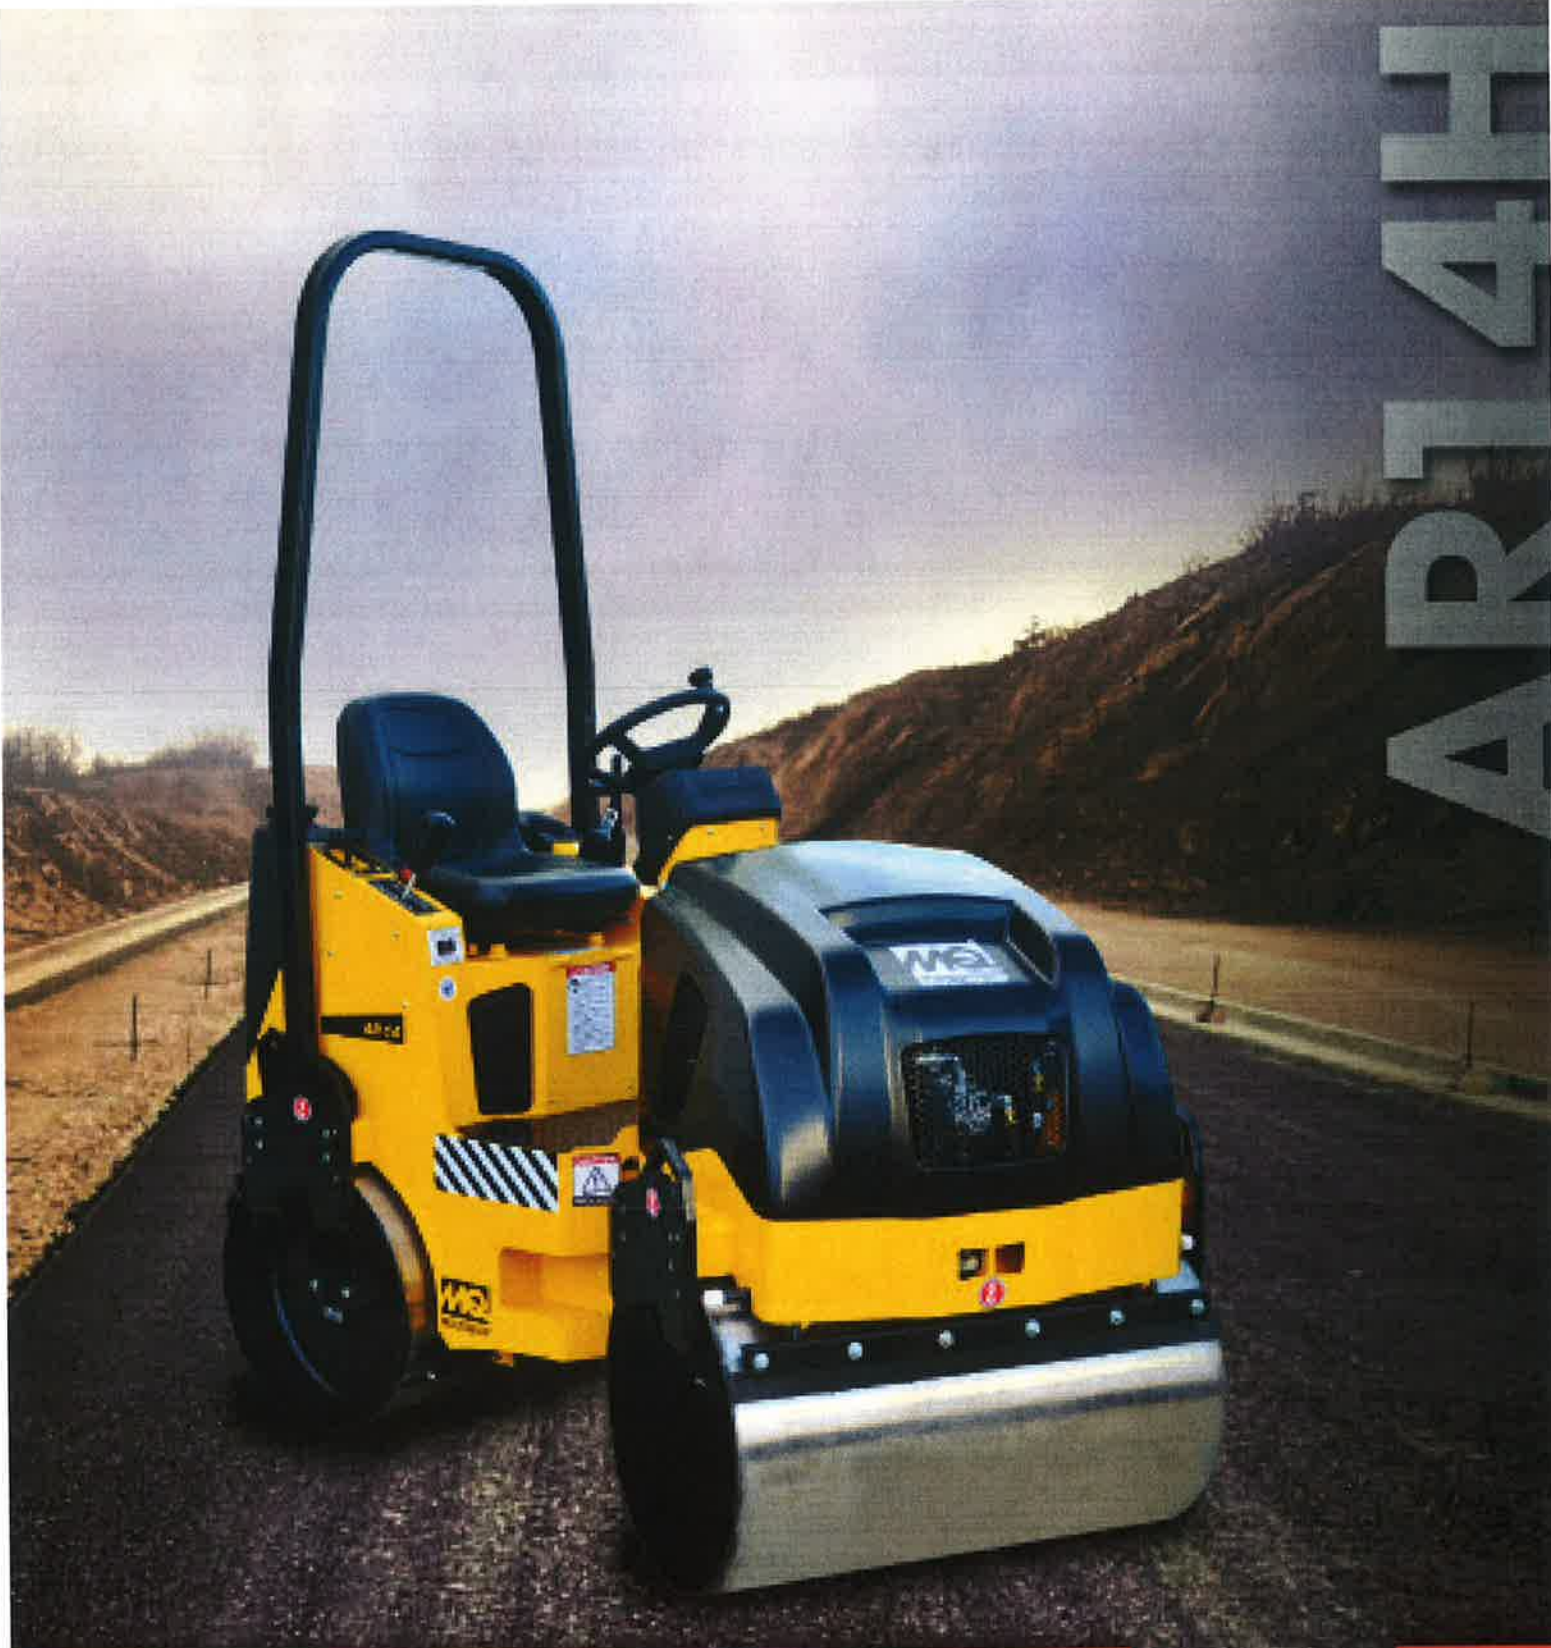

MQ's tandem drum ride-on roller is now more compact than ever. Meet the AR14, loaded with more features than you expect in a compact roller.

The compact, 1-ton class AR14-Series roller delivers exceptional compaction performance on asphalt and granular soils.

- 1** **Reliable Honda GX630 engine** offers easy starting and exceptionally quiet operation.
- 2** **Compact design** provides operator with clear line of sight for better steering.
- 3** **Recessed drive motors** and minimal frame overhang enables clearance of high curbs and obstructions.
- 4** **Maintenance free articulation joint and vibratory assembly** greatly reduces service time.
- 5** **Heavy duty** steel frame and high strength fiberglass composite resist wear and tear and are exceptionally durable.
- 6** **12V power outlet** charges portable electronic devices and cup holder holds standard travel mugs.
- 7** **Easy to use controls provide** intuitive access to vibration, water pump and water flow controls.
- 8** **Engine drain hose** simplifies service by facilitating clean and easy oil changes.
- 9** **35 gallon water tank** with tethered cap provides extended run time on asphalt applications and prevents lost caps.
- 10** **Hour/Tachometer** enable you to accurately measure hour usage and engine RPM.




Plastic water tank eliminates rust and pressurized system provides better water flow.




Dashboard with slide throttle control, 2 indicator lights, integrated choke and waterproof ignition.

Easy to Service Design

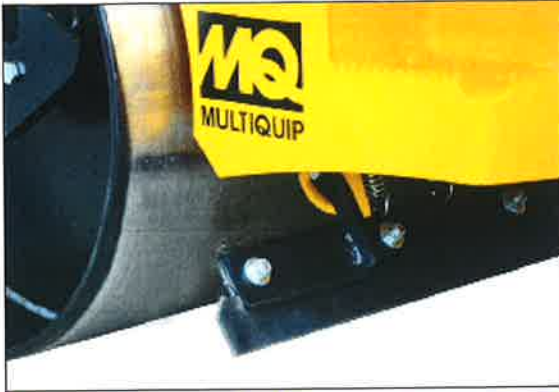

Maintenance free vibratory assembly requires no greasing over the roller's life.

Spring loaded scraper bar folds up for easy change out and cleanup.

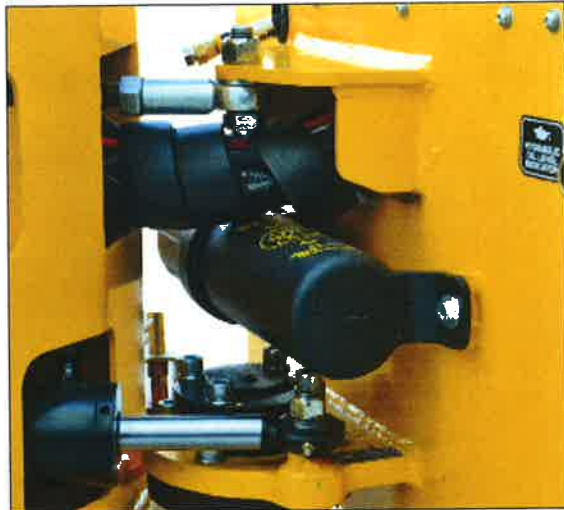

Maintenance free articulation joint greatly reduces service time.



Convenient access to the engine compartment places all filters, oil fills, fluid drains and hydraulic hoses within reach. Reduces time spent on scheduled maintenance.

Engine drain hose allows for clean and easy oil extraction.

Convenience



Open access to vibration and water pump switches and **simplified** single water flow control.



12V power outlet charges small portable electronic devices while the **cup holder** stores standard travel mugs.



Fuel Tank 9.5 gallon capacity with fuel level indicator provides long run time. Located under the seat for easy access.



SPECIFICATIONS AR14H

Weights and Dimensions	
Length - in (mm)	73.5 (1,867)
Width - in (mm)	37 (940)
Height - in (mm)	95 (2,413)
Curb Clearance Right - in (mm)	16.5 (419)
Curb Clearance Left - in (mm)	16.5 (419)
Wall Clearance Right - in (mm)	1.375 (35)
Wall Clearance Left - in (mm)	1.375 (35)
Operating Weight w/o Water - lbs (kg)	2,688 (1,219)
Performance Data	
Drum Width - in (mm)	35.6 (904)
Drum Diameter - in (mm)	22 (559)
Centrifugal Force (Front Drum) - lbf (kN)	3,400 (15.1)
Frequency - vpm (Hz)	4,200 (70)
Travel Speed Forward/Reverse - mph (kph)	4.8 (7.7)
Gradeability Maximum - (%)	25
Features	
Water Tank Capacity - gal (liter)	35 (133)
Water Delivery	Pressurized
Water Tank Construction	Plastic
Hood Construction	Fiberglass
Drum Water Ballast	Rear drum
Strobe Beacon	Option
Back-up Alarm	Option
Engine	
Manufacturer	Honda GX630
Operating Speed - (rpm)	3,240
Horsepower Rating - hp (kW)	20.8 (15.5)
Fuel Tank Capacity - gal (liter)	9.5 (36)

WARRANTY

AR14 - 1 year parts and labor. Contact Multiquip for complete warranty information.
Honda GX630 engine- 3 years. Please consult the manufacturer for warranty details and updates.

Your Multiquip dealer is:



www.multiquip.com

Connect with us



All features and specifications are subject to change without notice.
Version 0110

R2000H



Versatile. Reliable. Economical.



The **MQ R2000H Tandem**

Drum ride-on roller is the most economical roller in its category. The static compaction provides application versatility allowing contractors to compact virtually any soil type and asphalt mix. The simplified operation of this roller makes it reliable and easy to use.



- **Reliable Honda GX240 engine** offers easy starting and exceptionally quiet operation.
- **Convenient access to engine** places all filters and fluid drains within reach.
- **Premium cocoa mats** keep front and rear drums clean.
- **Split front drum** enables quick work on corners and curves without mat tearing.
- **Hydrostatic transmission** offers variable speed control in forward and reverse.
- **Automotive-type steering wheel** offers easy control over the roller.
- **Steering and drive lubrication points** are easily accessible.

WARRANTY:

R2000 - 1 year parts and labor. Contact Multiquip for complete warranty information.
Honda GX240 - 3 years. Please consult the manufacturer for warranty details and updates.

Specifications	R2000H
Operating Weight - lbs (kg)	1,382 (627)
Operating Weight Full Water Ballast - lbs (kg)	2,235 (1,014)
Length - in (mm)	73 (1,854)
Width - in (mm)	37 (940)
Height - in (mm)	51 (1,295)
Rolling Width Front - in (mm)	28 (711)
Rolling Width Rear - in (mm)	32 (813)
Roll Diameter Front - in (mm)	20 (508)
Roll Diameter Rear - in (mm)	24 (610)
Curb Clearance Right - in (mm)	3.25 (83)
Curb Clearance Left - in (mm)	9 (229)
Wall Clearance Right - in (mm)	3.25 (83)
Wall Clearance Left - in (mm)	1.75 (44)
Centrifugal Force - in (mm)	Static Weight
Travel Speed Forward/Reverse - in (mm)	5.6 (9)
Gradeability Maximum - (%)	15
Engine	
Engine Manufacturer	Honda GX240
Starting Method	Recoil/Electric
Operating Speed - (rpm)	3,600
Horse Power Rating - hp (kw)	7.9 (5.8)
Fuel Tank Capacity - gal (l)	1.6 (6.1)
Water System	
Water Tank Capacity - gal (l)	21 (79.5)
Front Ballast Water Capacity - gal (l)	30 (113.6)
Rear Ballast Water Capacity - gal (l)	51 (193)

Your Multiquip dealer is:

Connect with us on

